

EQ-9152

interM

STEREO GRAPHIC EQUALIZER




FEATURES

- **2 CHANNEL 15 BAND GRAPHIC EQUALIZER**
EQ-9152 contains 15 band for 2 channel, which have 2/3 octave from 25Hz to 16kHz.
- **40Hz LOW-CUT SWITCH**
40Hz Low Cut filter eliminates subsonic rumble and dangerous trashy low frequency.
- **ELECTRONIC BALANCED CIRCUIT**
This unit equipped with electronic balanced input and out put. Also designed to use XLR connector and phone jack for in & out.
- **BY-PASS CIRCUIT**
By pressing this switch input signal deliver to output directly. This is provided to connect the signal to next equipment when AC power failed.


SPECIFICATIONS

- **ELECTRICAL** * 0dB=1Vrms
 - Output Level.....0dB/600Ω BAL, -6dB/600Ω UNBAL
 - Input Sensitivity0dB/600Ω, BAL
 - T.H.DLess than 0.01%
 - Frequency Response.....20Hz~20kHz(-1dB)
 - S/N.....Better then 85dB
 - Equalizer Level±12dB
 - Equalizer Frequency.....25,40,63,100,160,250,400,630,1k,1.6k,2.5k,4k,6.3k,10k,16k
 - Low Cut Filter(40Hz)-12dB/Oct
- **GENERAL**
 - Power Source.....AC 110V-240V, 50/60Hz
 - Power Consumption.....15W
 - Weight.....3.8kg
 - Dimensions.....482(W) × 44(H) × 280(D)mm

EQ-9152

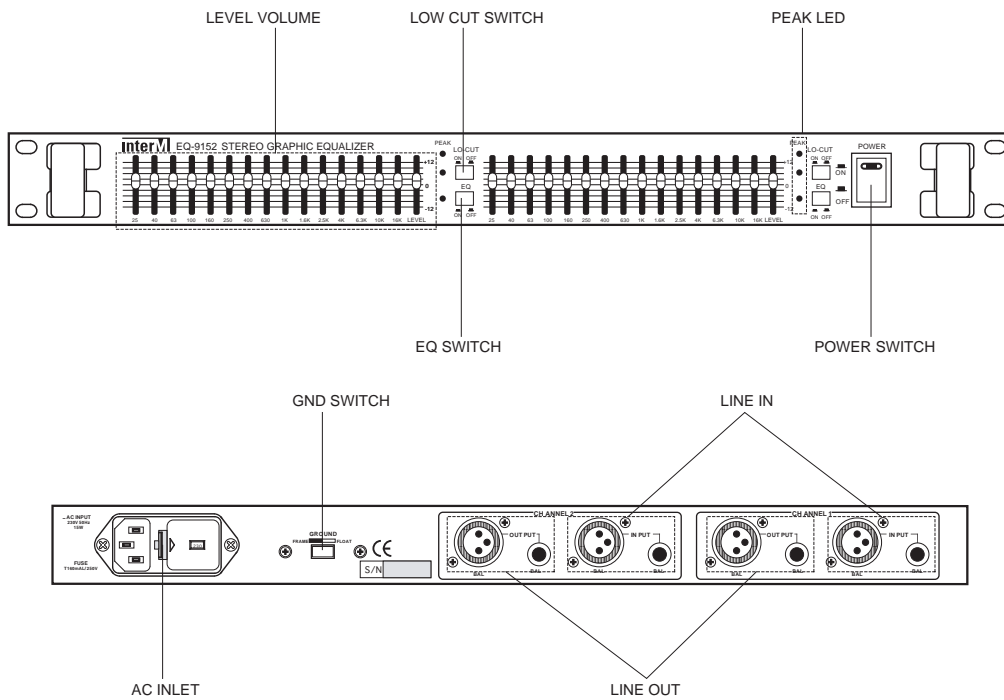

BLOCK DIAGRAM

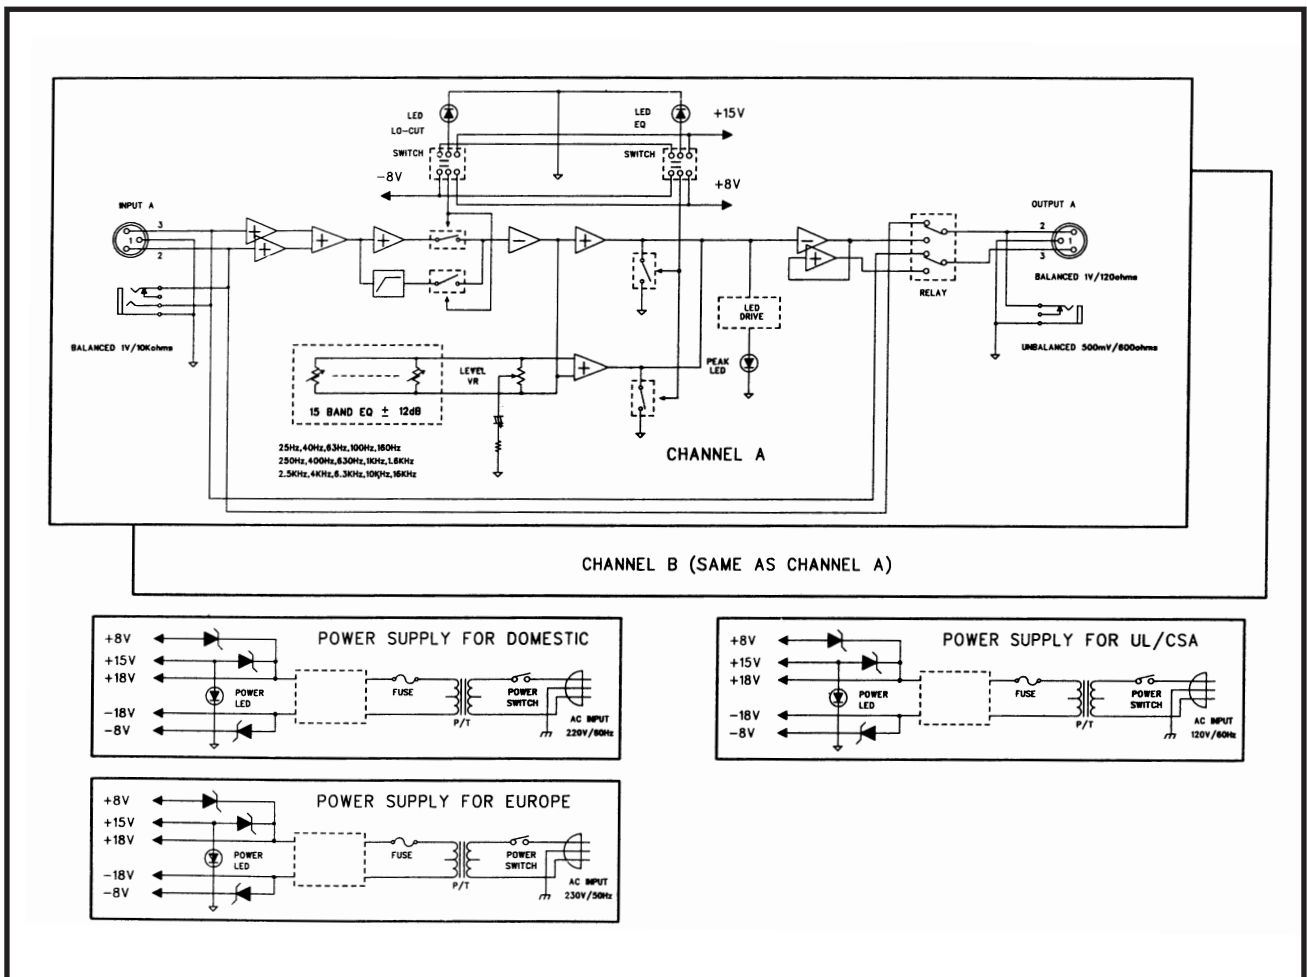

interM

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA TEL : 82-2-2289-8140~8, FAX : 82-2-2289-8149
 Home page : <http://www.inter-m.com> E-mail : export@inter-m.com